



VOLUME CONTROL DAMPERS
Round – Model WMVCD – Typical



For use in low and medium velocity non-corrosive air systems. Features 20-ga. galvanized steel frame with pressed-in neoprene bearings; 20-ga. galvanized steel blade mounted to 3/8" square axle; quadrant locking handle on 2" standoff. Measures 9" L. Mill finish.

No.	Dia. In.
WMVCD-06	6
WMVCD-08	8
WMVCD-10	10
WMVCD-12	12
WMVCD-14	14



YOUNG REGULATOR


SOCKET WRENCHES



For use with worm gear regulators and Bowden cable controls.

No.	Lgth. In.
030-12-SOCKET	12

MOTORIZED DAMPERS
Round – Model YR-4010




For zone control, make-up air, intake and exhaust applications. 2-position, 90-degree butterfly design. Features heavy-duty spiral shell, 24V motor with side-mounted

control box, 20-ga. V-style damper blade with position indicator and steel shafts.

No.	Dia. In.	Lgth. In.
YR-4010-06	6	12
YR-4010-08	8	12
YR-4010-10	10	12
YR-4010-12	12	12
YR-4010-14	14	14
YR-4010-16	16	16

REMOTE CABLE CONTROLS
Bowden – Series 270-275

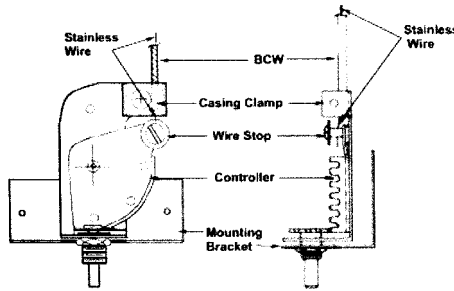

For positive locking control of dampers in inaccessible locations without access doors. Features steel rack and pinion with flexible casing and stainless steel wire. Can be installed on diffuser frame, inside plenum or on face of floor grille. Includes mounting hardware for most dampers.

No.	Hub Size	Desc.
270-275B-LH	Large	3/8" Sq. to 1/2" Round
270-275B-SH	Small	1/4" Sq. to 5/16" Round


CASING & WIRE
Bowden



Runs between damper and remote controller. Features .054" stainless steel torsion-straightened wire with 3/16" flexible galvanized coil spring casing.

No.	Lgth. Ft.
BOWDEN-CW-5	5
BOWDEN-CW-6	6
BOWDEN-CW-10	10
BOWDEN-CW-50	50


REMOTE CABLE CONTROLS
Bowden – Series 270-896




For positive locking control of dampers in inaccessible locations without access doors. Features steel rack and pinion with flexible casing and stainless steel wire. Controller with C-bracket fastens to ceiling or stud. Includes zinc-plated threaded cap, 7/8" diameter.

No.	Hub Size	Desc.
270-896B-LH	Large	3/8" Sq. to 1/2" Round
270-896B-SH	Small	1/4" Sq. to 5/16" Round

REMOTE CABLE CONTROLS
Bowden – Series 270-301



Series 270-301



Series 270-301-EZ

For positive locking control of dampers in inaccessible locations without access doors. Features steel rack and pinion with flexible casing and stainless steel wire. For installation at ceiling line. Includes 3" zinc-plated cover and mounting hardware for most dampers.

Series 270-301. Controller mounts atop concealed ceiling cup; unit is flush with finished surface. Cup measures 2-5/8" dia. x 15/16" D.

Series 270-301EZ. Controller and mounting bracket fasten to ceiling stud.

No.	Hub Size	Desc.
Concealed Cup & Cover Plate		
270-301B-LH	Large	3/8" Sq. to 1/2" Round
270-301B-SH	Small	1/4" Sq. to 5/16" Round
Mounting Bracket & Cover Plate		
270-301-EZB-LH	Large	3/8" Sq. to 1/2" Round
270-301-EZB-SH	Small	1/4" Sq. to 5/16" Round

**Phone or FAX
your order today!!**